

ISUZU

GIGA



PRIME MOVER

GCW 39,000kg

**GXR
360**



*** FULL AIR BRAKE ***
AUTO ADJUSTER

SPECIFICATIONS

GXR360

MODEL CODE		GXR77UU
Drive Train		4 x 2
ENGINE		
Model		6UZ1-TCC
Type	6-Cylinder In-line, 4 Cycle, Water-Cooled, OHC, Turbocharger with Intercooler	
Displacement	cc	9,839
Bore x Stroke	mm	120 x 145
Compression Ratio	17,5 : 1	
Maximum Output	kW (PS)@rpm	265 (360)@2,000
Maximum Torque	Nm (kgm)@rpm	1422 (145)@1,400
Emission Level	Euro 3	
Fuel System	Common Rail Direct Injection	
TRANSMISSION		
Model / No. of Speed		ZF9S1310, 9 Speed Manual
Gear Ratio	C	9,479
	1st	6,576
	2nd	4,678
	3rd	3,478
	4th	2,617
	5th	1,890
	6th	1,345
	7th	1,000
	8th	0,752
	Reverse	8,967
Final	5,429	
WEIGHT & CAPACITIES		
Gross Vehicle Weight (Design)	kg	19,000
Gross Combine Vehicle Weight	kg	39,000
Curb Weight	kg	6,063
Front	kg	4,008
Rear	kg	2,055
Fuel Tank Capacity	l	400 (Aluminium Alloy)
AXLE		
Front	Type	Reverse Elliot; I Beam
Front Axle Capacity (Design)	kg	7,500
Rear	Type	Banjo, Full Floating
Rear Axle Capacity (Design 1)	kg	13,000
Rear Axle Capacity (Design 2)	kg	-
Total Axle Capacity (Design 1+2)	kg	13,000
SUSPENSION SYSTEM		
Suspension	Front	Semi Elliptical Alloy Steel Leaf Springs Hydraulic Double Acting Telescopic Shock Absorber
	Rear	Semi Elliptical Alloy Steel Leaf Springs Hydraulic Double Acting Telescopic Shock Absorber
TYRES & WHEELS		
Tyres	295 / 80R22.5	
Wheels	22.5 x 8.25 (ISO 10 Studs)	
BRAKES		
Service	Full Air with Anti-Lock Braking System (ABS), Auto Adjuster	
Parking Brake Type	Spring Acting, Rear Wheel Parking	
Auxiliary	Exhaust Brake	
STEERING		
Steering System	Power Assisted, Hydraulic Integral, Recirculating Ball, Energy Absorbing, Tilt & Telescopic Column	
Min. Turning Radius	m	6.3
ELECTRICAL		
Battery	12V x 2	
Alternator	24V-60A	
DIMENSION		
Overall Length	OAL mm	5,991
Overall Width	OAW mm	2,490
Overall Height	OAH mm	2,989
Wheelbase	WB mm	3,480
Front Overhang	FOH mm	1,480
Rear Overhang	ROH mm	1,031
Front Tread	AW mm	2,065
Rear Tread	CW mm	1,850

ISUZU

ISUZU MALAYSIA SDN BHD 200401026438 (664946-H)

501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my



ISUZU SERVICE CENTRE SDN BHD 201601034731 (1205672-X)

LOT 730, JALAN SG. RASAU, SECTION 17,
40000 SHAH ALAM, SELANGOR DARUL EHSAN.
PHONE: 03-5513 0518
FAX: 03-5512 7550

PERFORMANCE






6UZ1-TCC

Displacement: **9,839cc**

Max. Output: **360ps @2,000rpm**

Max. Torque: **1422Nm (145Kgm)
@1,400rpm**

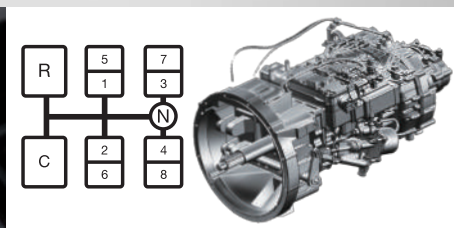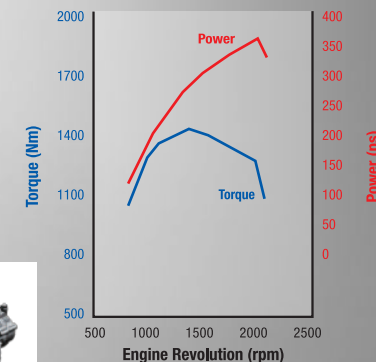


▲ ZF 9-Speed Transmission with Crawler Gear.

EXTERIOR



▲ Bigger and durable aluminium alloy fuel tank with lockable cap.

SAFETY

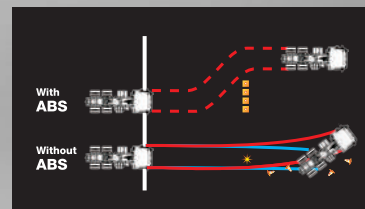

▲ Anti-Lock Braking System (ABS).



▲ Full Air Wedge Brake with Auto Adjuster.

Dealer's information

